


Tyre Changer – Automatic

Tyre changer > TW X-31 | TW X-36

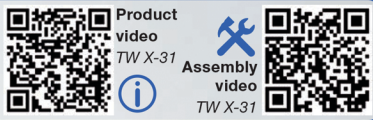


Product video
TW X-31

Assembly video
TW X-31



Bead press and edge protection included free of charge!

NEW

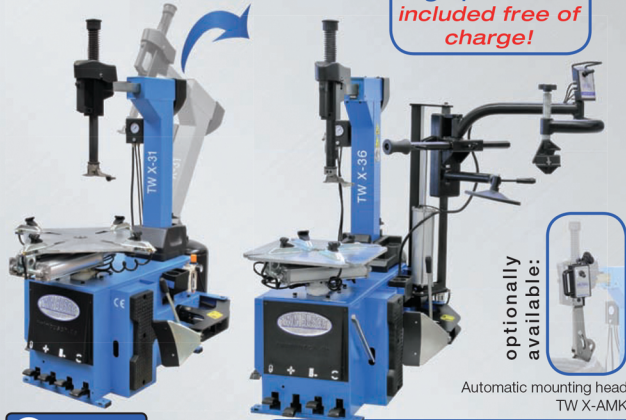

optionally available:



Automatic mounting head
TW X-AMK

⊕ 14" - 26"

⚡ 400 V

⊖ 12" - 24"

Check our technical decisions helper (on page 42) before you buy your Tyre fitting machine



Produkt-video
TW X-36

Assembly video
TW X-36



Tyre changer | Automatic

Item No.: TW X-31 | X-36

Description

Tyre changer with pneumatically operated tilting column and integrated air-booster. Ideal for all standard, low profile and run flat tyres. TW X-36 with help-arm, TW X-31 without the help arm can be added as an option at anytime.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- The mounting arm tilts backwards
- Solid construction | Gentle on the rims
- Pneumatically adjustable mounting head
- Powerful bead breaker (2500 kg)
- Self centering 4 jaw clamping system
- Large clamping range for cars and vans (Outside 12" - Inside 26")
- Air booster integrated in the clamping jaws
- Exchangeable plastic protectors for the mounting head
- High quality stainless steel components in the inner part
- Precise control block with STOP function
- Powerful electrical motor
- Clamping jaws made of special steel

Delivery contents

- Tyre changer with maintenance unit
- Air filler and lifting lever
- Bead press and edge protection
- Plastic protectors for the mounting jaws (4 pcs.)
- Plastic protectors for the mounting head (set 3 pcs.)
- Operating instructions and CE-Certificate


Details



(1) Powerful bead breaker (2) Fine adjustment by joystick (on the mounting arm) (3) Help-arm with bead roller, bead presser and bead loosening disk (4) Large air tank for the integrated air boosters in the mounting jaws



Dimensions | Technical data | Accessories

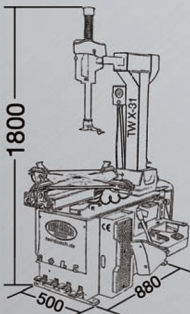

Extensive accessories

Technical Data: TW X-31 / X-36	
Clamping range outside	12" - 24"
Clamping range inside	14" - 26"
Wheel diameter (max.)	45" (1143 mm)
Wheel width (max.)	16" (406 mm)
Bead breaker force	2500 kg
Air supply	8-10 bar
Power supply	400 V / 3 Phase
Motor power	0,75 kW
Noise level	<70 dB
Weight (approx.)	246 / 320 kg